

TPE Weather Stripping - RP600 Series

Joinery Seals for Doors and Windows



Approvals

Fire Flammability index ≤ 5 when tested to AS1530.2.

Weather AUS/NZ: NCC various sections. AS2047, AS4055, AS/NZS 4420 Pt. 0 to 5 & AS/NZS 1170.

UK/EU: Approved Document L1 & L2. Tests above are similar to BS 5368 & BS 7386.

Energy NCC Pt. 3.12.3.3 & J3.4.

RP680

Location: Proprietary aluminium or PVC door and window frame groove where dimensions suit.


Compression: 1mm to 3mm.

Finish: Black.


Fixing: Slide fit into aluminium or rigid PVC groove where dimensions suit. (Channel not supplied).

Sizes: 100m, 24m.

Approvals: Fire & Energy.



Recommended groove dimensions. Channel not supplied.

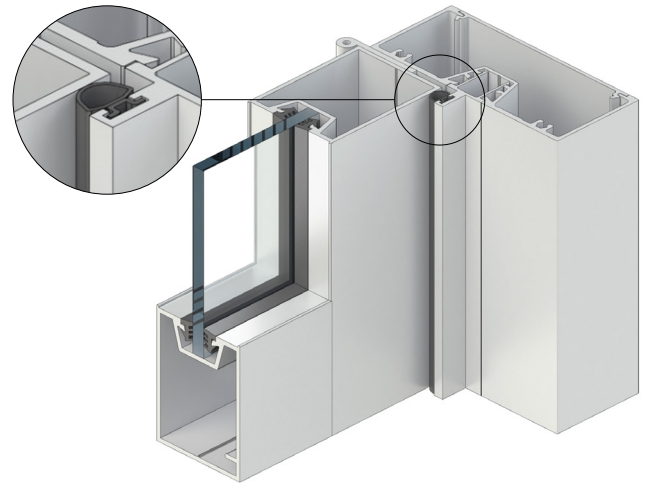

Ritz-Carlton – Elizabeth Quay, WA

Raven Products was proud to supply our architectural range of products to the Ritz Carlton project located on the Swan River at Elizabeth Quay. The \$500 million project is a prestigious example of urban architecture where design meets location.

The two six-star towers combine 205 five-star hotel rooms, 379 residential apartments, communal areas and event facilities while the ground floor features retail, dining, and entertainment spaces as well as on-site parking.

Requirements

Key requirements for the project included Raven fire and smoke sealing systems that offer high acoustic performance. The Raven systems chosen needed to harmoniously integrate within the Architectural design elements.

Benefits

Additionally, Raven's black anodised RP127Si Automatic seals were also selected, as they offer a balance of contemporary design with heavy duty performance to satisfy the clients' high expectations of 'fit for purpose' solutions. This is an important consideration for specifiers where heavy pedestrian and wheeled traffic is to be experienced through doorways.